

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS



LIVIA 160

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, protection rating IP55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GX53 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




3A9.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6



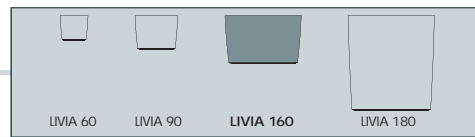

LIVIA 160 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GX53 lampholder.


BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada GX53.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

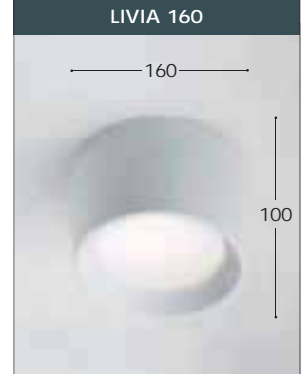

Dimensions and weight

Diameter: Ø160 mm
Height: 100 mm
Weight: 0.76 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED

100 - 240 V

*ADD. SUFFIX



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	


Ceiling surface downlight supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3W 410 Lm = 40W incandescent
SAVE 93%

10W 1290 Lm = 100W incandescent
SAVE 90%

CCT SETTABLE LED LAMP





CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA RANGE

DOWNLIGHT

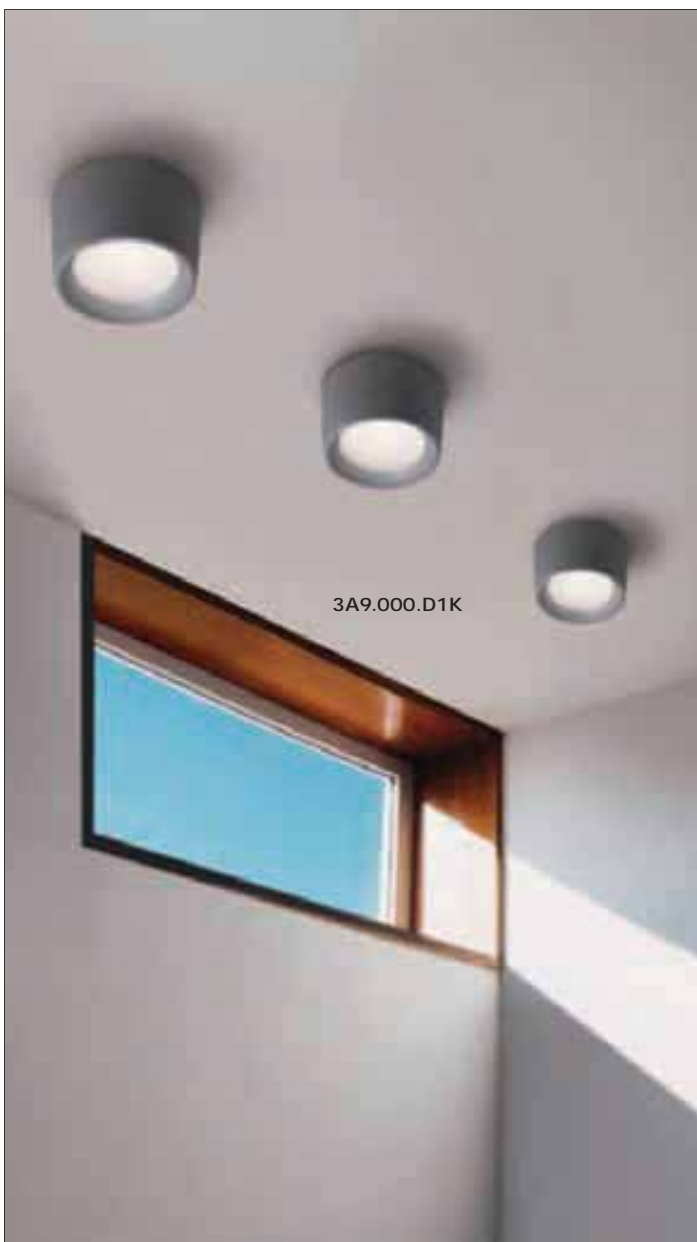

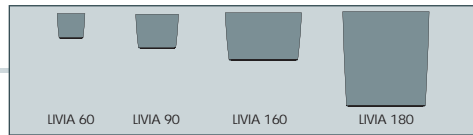

LIVIA 60		
1A9.000.Z1L	1,7W	1A9.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K
Pcs 75	Kg 8,4	mc 0,057

LIVIA 90	
2,9 W	2A9.000.U1K
4,8 W	2A9.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 30	Kg 12,6 mc 0,09

LIVIA 160	
3W	3A9.000.G1K
10W	3A9.000.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 18	Kg 15,3 mc 0,092

LIVIA 180	
15W	4A9.000.R1K
30W	4A9.000.Q1K
CCT SETTABLE E27 HIGHPOWER LED LAMP INCLUDED 3000K/4000K	
Pcs 12	Kg 22,5 mc 0,147