



Pro Strips

Professional quality 24V LED strip range for indoor use



Paulmann – a family business creating lighting ideas for 45 years

Paulmann Licht GmbH was founded in 1978 and is a leading brand manufacturer in the lighting industry. True to our motto "Realise your lighting ideas", we offer our customers high-quality light to make them feel good, and with high energy efficiency – both indoors and outdoors.

We are a German family business based in Springe, Lower Saxony, employing 450 people worldwide and distributing in over 40 countries in Europe. As a member of the UN Global Compact network, we attach great importance to sustainable business practices, environmental protection and social commitment. We are pursuing a programme to reduce the carbon footprint of our sites and products.

Our complete range features over 2,500 luminaires and lamps, for versatile packages with excellent value for money for every application. In particular, the system solutions for 1-phase and 3-phase light rails, recessed luminaires and panels, bathroom luminaires, profile strips and profiles as well as the 24 V "Plug & Shine" plug-in system for outdoor areas enable you as a planner and craftsman to optimally implement the individual wishes of your customers – including Zigbee

luminaires and components for smart control. We are a DIALux premium partner, which means that you benefit from additional planning security and can offer solutions tailored to your customers.

Our in-house designers, constructors and electronics engineers bring together technology, design and user benefits during product development and ensure the high-quality for which Paulmann is rightly famous.

Each of our products is accompanied by Paulmann product experts from the initial idea through to development, manufacture and final delivery. All our items and components are regularly checked by our own in-house Quality Assurance, as well as by external certified test laboratories. That's why we give a 5-year warranty on our Paulmann luminaires and transformers.

Our customers know that they can count on our extensive range and our excellent service: from product to logistics, service to content creation and product presentation.

For this reason, more than 20,000 trade customers throughout Europe rely on Paulmann for their lighting needs:

- Quick and reliable delivery
- High availability of goods
- Goods delivered within 48 hours for customers in Germany and within 72 hours throughout Europe
- Deliveries from quantities of 1
- Low freight-free threshold
- Standardised product data in ETIM format
- Options via EDIFACT: orders, order confirmations, delivery notes, invoices
- Paulmann Academy provides up-to-date product information online
- Expert service team

Contents

Pro Strips	8
Silver or Gold Line	10
Designation of light output classes	10
Light colour and colour rendering index as part of the designation	10
Pro Strips silver range	12
Silver P25 – accent lighting	12
Silver P75 – auxiliary lighting	14
Silver P150 – indoor lighting	15
Pro Strips gold range	16
Gold P25 – accent lighting	17
Gold P75 – auxiliary lighting	18
Gold P150 – indoor lighting	19
Gold P150 COB – indoor lighting	19
Remotes & controllers	21
Feeds & connectors	24
Power supplies	26
Packaging concept	27
Profiles	28
Delta Profile	29
Floor Profile	29
Corner Profile	30
Duo Profile Set	30
Tube Profile	31
Base Profile	31
Square Profile	31



Sustainability at Paulmann

Social responsibility, environmental protection and sustainable corporate management play an important role in the Paulmann family business. We have integrated a holistic sustainability strategy into our corporate strategy, which equally includes ecological, economic and social aspects. In this way, we are actively committed to achieving the Sustainable Development Goals (SDGs). We are constantly revising the way we use light and developing lamps and luminaires that enable the economical use of energy and resources. But sustainability at Paulmann doesn't stop with the development and production of our products! At the same time, we are continuing to develop Paulmann's role as a company, and our influence on the three pillars of sustainability.



Social commitment in the region

At Paulmann, we are a family – and this is reflected in the DNA of the family business. Providing equal opportunities and working for the common good are values that are deeply embedded in our culture. We work together to put the health and satisfaction of our employees and customers first.


Our goal is to actively take responsibility for our community and to set a positive example. That is why Paulmann has been supporting various local aid organisations and projects for children and young people in our region.



FSC®-certified products contribute to sustainable forestry around the world. The certification ensures that wood-based raw materials for our products come from sustainable and responsible sources only.



Shipping packaging consists of 100% recycled material. Cardboard already accounts for over 90% of product packaging. As of 2023, all new products – where possible – will be packaged completely without plastic.

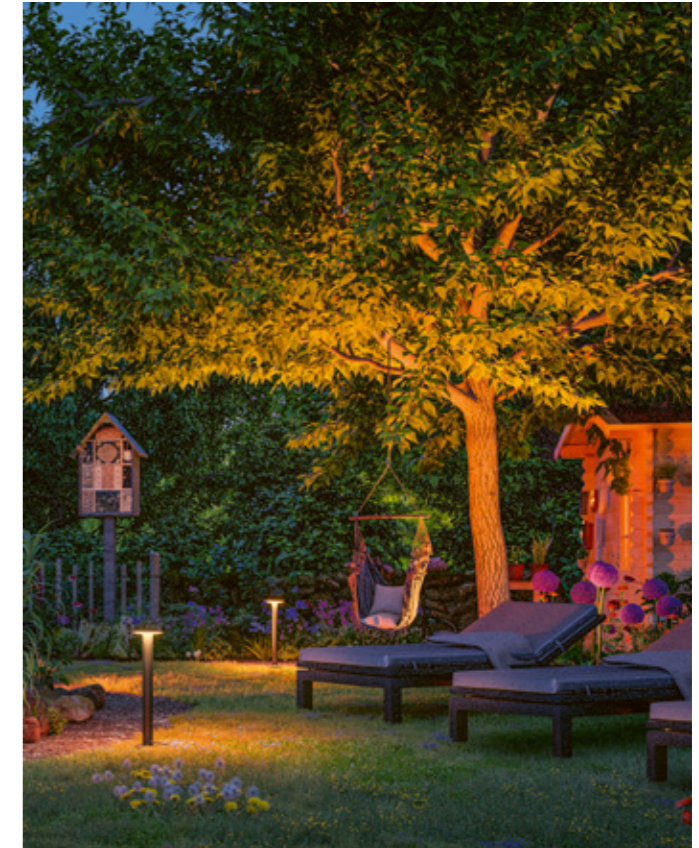

The insect-friendly outdoor luminaire range with 2200 K gold light provides safety and atmosphere while attracting hardly any insects, thus protecting biodiversity.

Ecology – focussing on CO2 reduction

From green electricity and recycling to optimising our sales packaging and shipping processes: step by step, we at Paulmann are working to reduce our CO2 footprint as much as possible.

We want to consistently reduce our emissions and are constantly pursuing our numerous reduction measures – ideally until we achieve net zero emissions. To achieve this, we are focussing our resources and investments on measuring, analysing, avoiding and reducing our emissions. In order to constantly identify further improvements, we calculate our CCF – Corporate Carbon Footprint – annually in accordance with the Greenhouse Gas Protocol. We also aim to support the region where Paulmann has its roots, and so we invest in regional projects and the expansion of our company-wide reduction measures. For example:

- We use green electricity from 100% renewable energy at the company headquarters in Völkzen.
- We are installing e-charging stations and gradually converting our vehicle fleet to e-mobility.
- We are currently planning to build a photovoltaic system at our company headquarters.
- We are constantly optimising our shipping process by saving material and increasing the proportion of recycled material.

Economy and governance – with responsibility and sustainability

We are convinced that responsible and long-term business activities can only be achieved by adhering to fair business practices. Sustainable business operations with high-quality materials, fair wages, career building opportunities for employees, training courses and apprenticeships for the next generation of employees, as well as investment to strengthen the overall business model are just as important for ensuring a holistic sustainability strategy. Paulmann has its roots in the region, and is known as a stable employer. In addition, Paulmann offers a range of apprenticeships, ensuring well-qualified junior staff.

Paulmann wants to systematically create maximum transparency in the supply chain, in accordance with the requirements of the German Supply Chain Act.



As a member of the UN Global Compact, Paulmann publishes an annual progress report on the achievement of the Sustainable Development Goals.





Pro Strips

Professional quality 24V LED strip range for indoor use

The Paulmann Pro Strip range includes professional-quality LED strips in silver and gold, matching accessories such as controllers, power supply devices and a wide range of different connectors.

Our comprehensive range for professional indoor lighting projects: from decorative presentation to bright room lighting.

The product range is designed for professional craftspeople, such as electricians, but also for planners such as architects and engineers. Our Silver and Gold Line meet consumer demand for comprehensive high-quality solutions, for private customers, small businesses such as offices, doctor's practices, and shops, as well as for the hospitality and hotel industry.

All items are perfectly coordinated and meet high quality standards. That is why we offer a 5-year warranty on all items.

With Paulmann as your supplier, the breadth of our range enables you to meet all your customers' requirements and to implement them in the best possible way.





Silver Line and Gold Line

The LED strips from the Silver and Gold Line differ in their colour rendering (CRI), colour consistency (SDCM) and service life.

The Silver Line and Gold Line are available in different light output classes in single colours, and the Silver Line is also available in RGBW (RGB and white).

All Pro Strips are uncoated (IP20) and have a connection cable on both sides (200 mm). They can be individually shortened and have high-quality 3M adhesive strips on the back to ensure easy installation.

DIALux

For optimum planning reliability, DIALux data is available for all Pro Strips.

Silver		Gold	
CRI 80		CRI 90	
SDCM 5		SDCM 3	
30,000 h		50,000 h	
P25	P75	P150	
accent lighting	auxiliary lighting	indoor lighting	
60 LEDs/m	96 LEDs/m	160 LEDs/m	
~ 300 lm/m	~ 750 lm/m	~ 1,500 lm/m	
Variants			
10 m roll		COB 5 m	
Basic range			
IP20 (uncoated)			
Connection: 2-phase or 5-phase on both sides			
5 m roll			

Designation of light output classes

The clear structure of the lines allows for quick selection of the right items for any use.

P25 – accent lighting

For highlighting furniture, fittings, wall textures and room sections

P75 – auxiliary lighting

Additional lamp to complement indoor lighting

P150 – indoor lighting

For bright lighting without auxiliary lighting

Light colour and colour rendering index as part of the designation

The designations of all strips contain simple and clear coding that reflects their product line.

In addition to the light output class (e.g. P25), a combination of the colour rendering index (CRI) and the light colour (Kelvin) is specified on the conductor of the strip.

The designation makes it easier to provide advice to customers and to identify the product, especially after it has been installed.

Silver: Accent lighting

CRI 80 – 3000 K
P25 830



Another example of a product code:

Gold: Indoor Lighting

CRI 90 – 6000 K
P150 960



Pro strips silver range

- High-quality LED strips
- Good colour rendering and colour consistency
- Long service life of 30,000 h
- Covers all common luminous intensities and light colours
- Available in single colours and RGBW
- DIALux data available for all strips




Pro Strips Silver specifications:

Colour rendering index	Ra 80 (white light)
Colour consistency	5 SDCM
Service life L70B50	30,000 h
Connection type	open cable end on both sides
Connection cable	200 mm
IP protection	IP20
Voltage	24 V DC
Warranty	5 years

Silver P25 – accent lighting

Single colours – white light

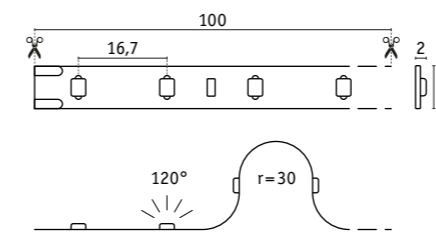


Number of terminals: 2-wire
Max. feed length: 5 m



Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
● red	80	18.2	4.4	60	5		76006
● green	300	68.2	4.4	60	5		76007
● blue	60	13.6	4.4	60	5		76008
● violet	60	13.6	4.4	60	5		76009
● ice blue	300	68.2	4.4	60	5		76010
● orange	300	68.2	4.4	60	5		76011
	2,700	400	100.0	4.0	5	F	76013
	3,000	400	100.0	4.0	5	F	76014
	4,000	420	105.0	4.0	5	F	76015

Silver P25 – accent lighting

RGBW

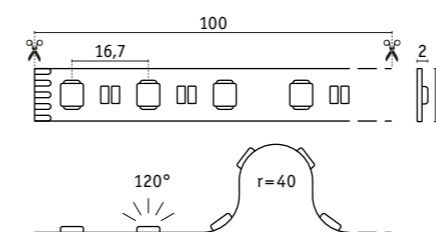

Number of terminals: 5-wire
Max. feed length: 5 m

Installation information: must be installed on a metal surface to allow for heat dissipation (e.g. aluminium profile)



Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
— Total	540	36.0	15				
— RGBW 3,000	300	75.0	4	60	5	G	76012




Pro Strips Silver specifications:

Colour rendering index	Ra 80
Colour consistency	5 SDCM
Service life L70B50	30,000 h
Connection type	open cable end on both sides
Connection cable	200 mm
IP protection	IP20
Voltage	24 V DC
Warranty	5 years

Silver P75 – auxiliary lighting

White light

High efficient ≤156 lm/W

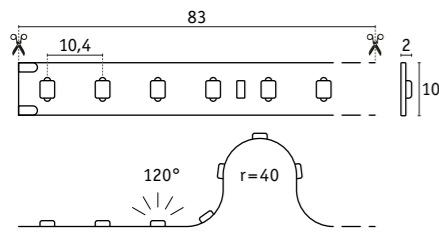

Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
2,700	700	145.8	4.8	96	5	D	76016
3,000	700	145.8	4.8	96	5	D	76017
4,000	750	156.3	4.8	96	5	D	76018
6,500	750	156.3	4.8	96	5	D	76019
2,700	700	145.8	4.8	96	10	D	76025
3,000	700	145.8	4.8	96	10	D	76026
4,000	750	156.3	4.8	96	10	D	76027
6,500	750	156.3	4.8	96	10	D	76028

Number of terminals: 2-wire


Max. feed length: 10 m



Silver P150 – indoor lighting

White light


High efficient ≤156 lm/W

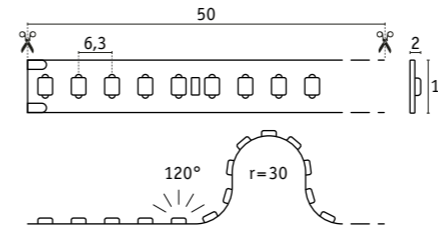

Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
2,700	1500	150.0	10.0	160	5	D	76021
3,000	1480	148.0	10.0	160	5	D	76022
4,000	1530	153.0	10.0	160	5	D	76023
6,500	1550	155.0	10.0	160	5	D	76024


Number of terminals: 2-wire

Max. feed length: 5 m



Silver P75 – auxiliary lighting

RGBW

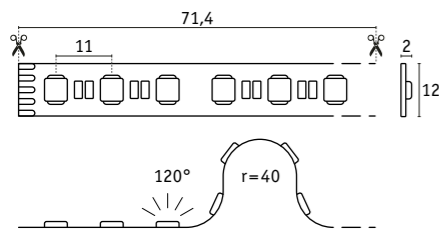

Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
Total	1050	43.0	24.2	84	5	G	76020
RGBW	3,000	700	79.5	8.8			

Number of terminals: 5-wire


Max. feed length: 5 m

Installation information: must be installed on a metal surface to allow for heat dissipation (e.g. aluminium profile)



Silver P150 COB – indoor lighting

White light

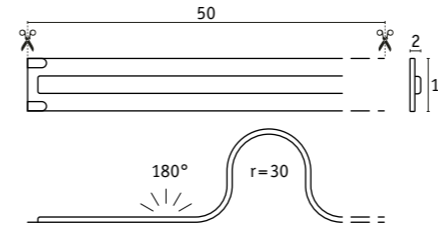

Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
2,700	1270	88.2	14.4	528	5	G	76029
3,000	1270	88.2	14.4	528	5	G	76030
4,000	1400	97.2	14.4	528	5	F	76031
6,500	1400	97.2	14.4	528	5	F	76032

Number of terminals: 2-wire

Max. feed length: 5 m

Installation information: must be installed on a metal surface to allow for heat dissipation (e.g. aluminium profile)





Pro strips gold range

- High-quality LED strips to meet the highest standards with regard to lighting quality
- Excellent colour rendering and colour consistency
- Very long service life of 50,000 h
- Covers all common luminous intensities and light colours
- DIALux data available for all strips




Pro Strips Gold specifications:

Colour rendering index	Ra 90
Colour consistency	3 SDCM
Service life L70B50	50,000 h
Connection type	open cable end on both sides
Connection cable	200 mm
IP protection	IP20
Voltage	24 V DC
Warranty	5 years

Gold P25 – accent lighting

White light

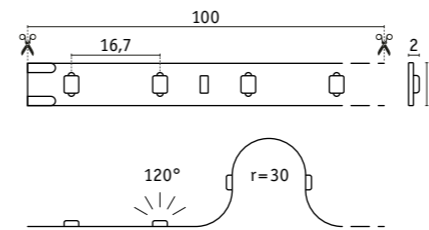

Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	⊠	Item
2,700	380	86.4	4.4	60	5	G	78438
3,000	380	86.4	4.4	60	5	G	78439
4,000	420	95.5	4.4	60	5	F	78440

Number of terminals: 2-wire

Max. feed length: 5 m






Pro Strips Gold specifications:

Colour rendering index	Ra 90
Colour consistency	3 SDCM
Service life L70B50	50,000 h
Connection type	open cable end on both sides
Connection cable	200 mm
IP protection	IP20
Voltage	24 V DC
Warranty	5 years

Gold P75 – auxiliary lighting

White light

High efficient ≤132 lm/W

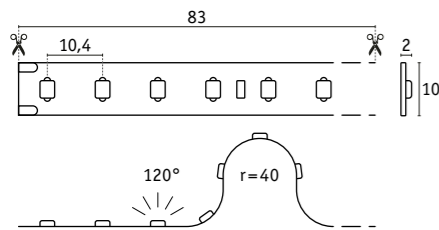

Number of terminals: 2-wire
Max. feed length: 10 m




Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
2,700	750	125.0	6.0	96	5	E	78441
3,000	750	125.0	6.0	96	5	E	78442
4,000	790	131.7	6.0	96	5	E	78443
6,500	790	131.7	6.0	96	5	E	78444
2,700	750	125.0	6.0	96	10	E	78449
3,000	750	125.0	6.0	96	10	E	78450
4,000	790	131.7	6.0	96	10	E	78451
6,500	790	131.7	6.0	96	10	E	78452

Gold P150 – indoor lighting

White light

High efficient ≤132 lm/W

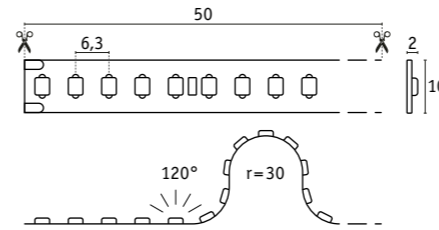


Number of terminals: 2-wire
Max. feed length: 5 m



Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
2,700	1500	119.0	12.6	160	5	E	78445
3,000	1500	119.0	12.6	160	5	E	78446
4,000	1600	127.0	12.6	160	5	E	78447
6,500	1600	127.0	12.6	160	5	E	78448


Gold P150 COB – indoor lighting

White light

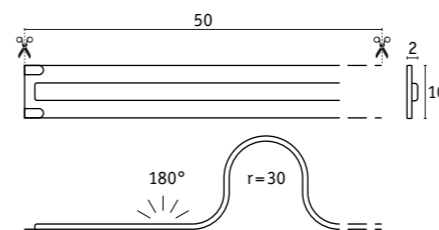

Number of terminals: 2-wire
Max. feed length: 5 m


Installation information: must be installed on a metal surface to allow for heat dissipation (e.g. aluminium profile)



Light colour (K)	lm/m	lm/W	W/m	LEDs/m	Length (m)	A-G	Item
2,700	1270	88.2	14.4	528	5	G	78453
3,000	1270	88.2	14.4	528	5	G	78454
4,000	1400	97.2	14.4	528	5	F	78455
6,500	1400	97.2	14.4	528	5	F	78456




Accessories overview

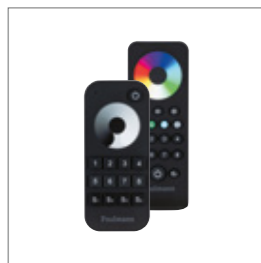

p. 21 Remotes



p. 21 Controllers



p. 24 Feeds



p. 24 Connectors







p. 26 Power supplies

Remotes & controllers

Controllers

- Single and multi-zone control
- Quick connection via match key – super quick connection of controllers & remotes
- Automatic transfer: indoor mesh network ~ 15 m*
- Precision dimming: 5–100% dimming range
- Push dimmer: wall switch connection available for easy control without a remote control
- Multiple protection: overload, overheat and short-circuit protection

Controllers

	Single colour	RGBW/RGB/CCT
		
		

Technical data

Input voltage	12–48 V	12–48 V
Output voltage	12–48 V	4 x (12–48) V
Output	7.5 A / channel 180 W (24 V DC)	2.5 A / channel 240 W (24 V DC)
Output voltage	constant voltage (PWM)	constant voltage (PWM)
IP protection	IP20	IP20
Ambient temperature Ta	-30° to +55°C	-30° to +55°C
Housing temperature Tc	+85°C	+85°C
Memory function	✓	✓
Protection function 1	incl. strain relief	incl. strain relief
Protection function 2	overheating protection	overheating protection
Radio range	30 m (barrier-free)	30 m (barrier-free)
Packaging unit	1	1
Warranty	5 years	5 years

Item 78470

Item 78471

Remotes

- Ultra-sensitive touch wheel for colour adjustment
- Each remote control can be paired with one or more receivers

Remotes

	Single colour	RGBW
		


Technical data

Input voltage	3 V DC / 2xAAA	3 V DC / 2xAAA
Switchable	dimming – on/off	colour selection, dimming – on/off
Zones	8 zones	8 zones
Scenarios	4 scenarios	2 scenarios
Modes		10 dynamic modes
Product features		
Rubberised housing	✓	✓
Accessories	*magnetic wall mounting bracket (screwable base)	*magnetic wall mounting bracket (screwable base)
Radio range	30 m (barrier-free)	30 m (barrier-free)
Packaging unit	1	1
Warranty	5 years	5 years


Item 78472

Item 78473

Zone control

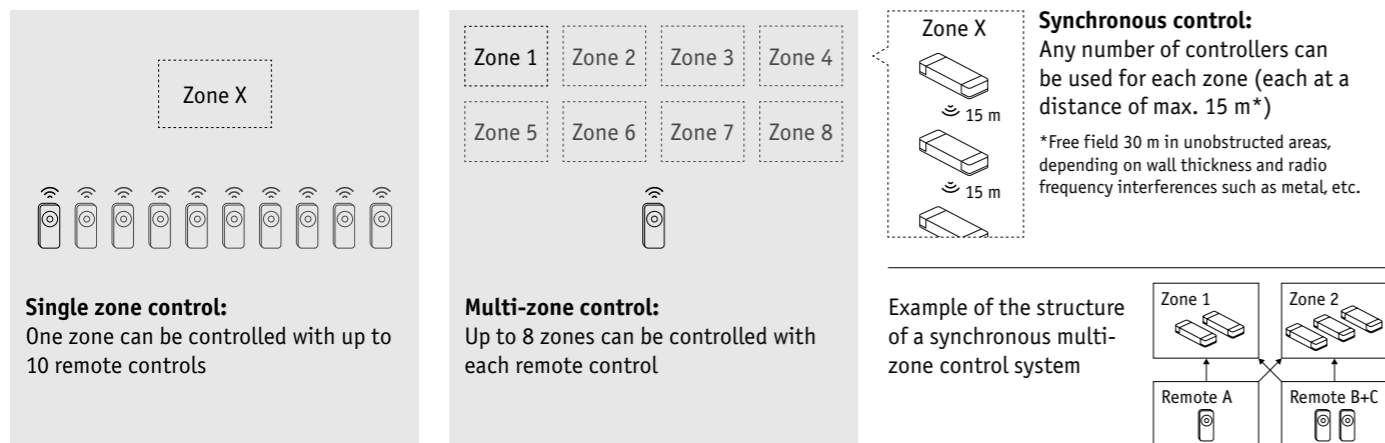


Application example of multi-zone control

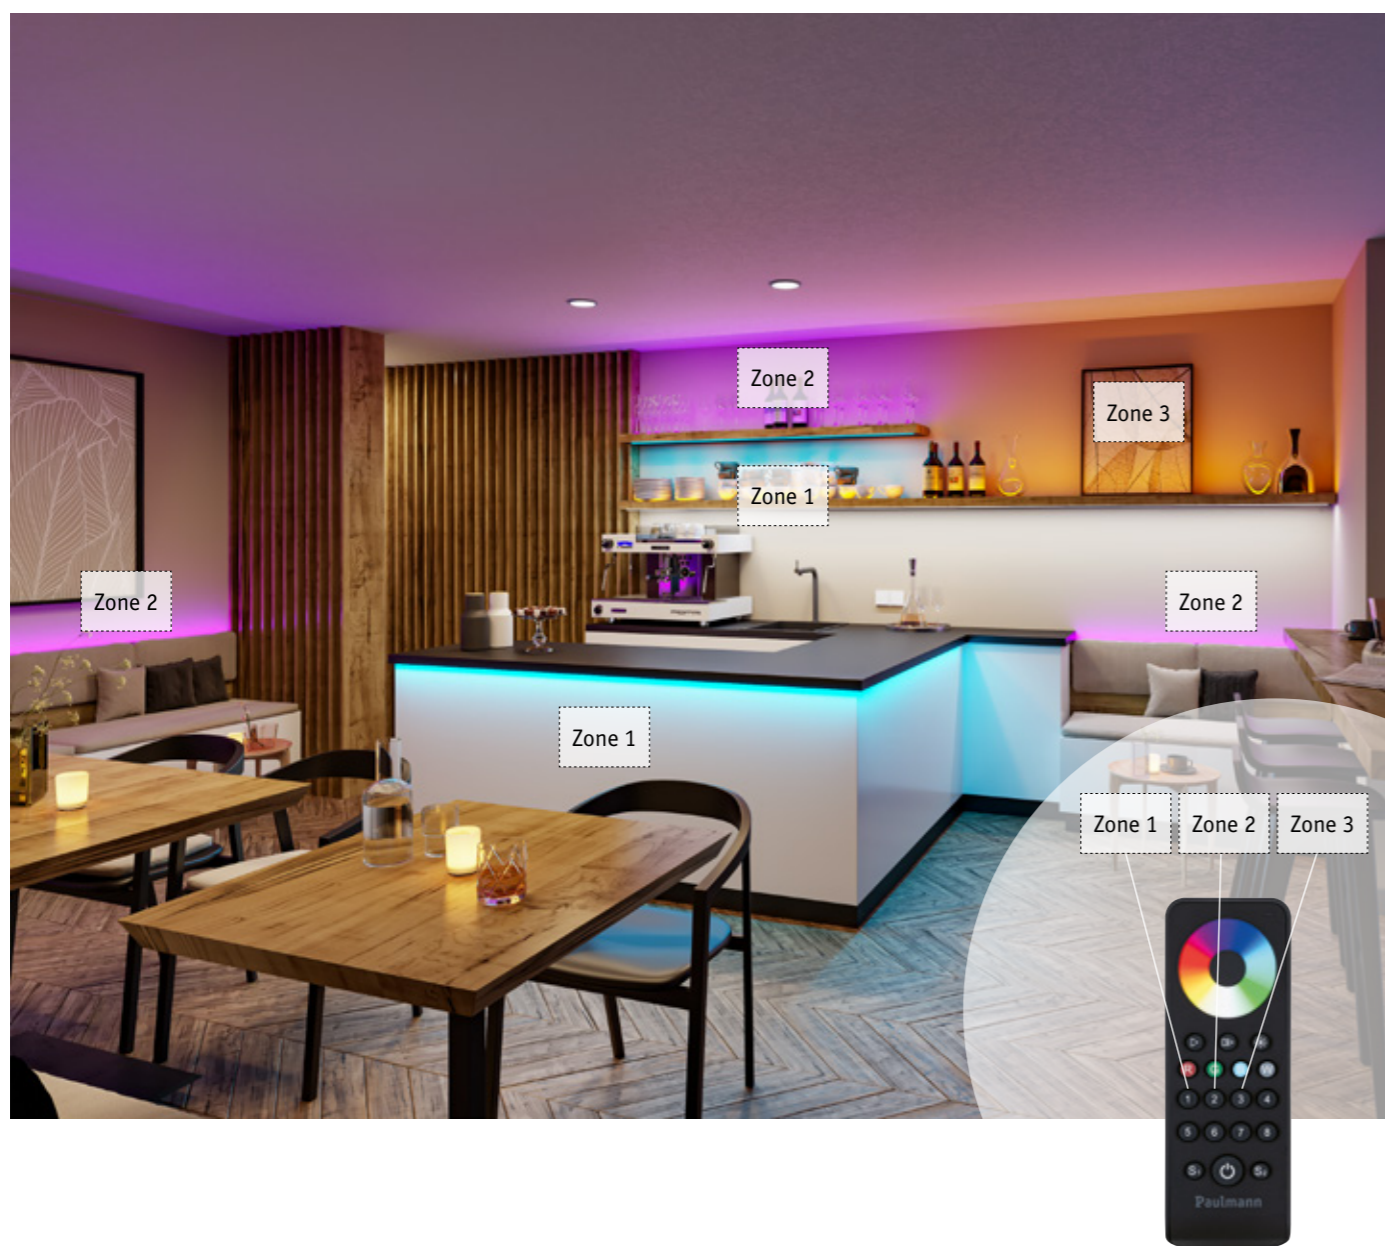


Connection options


Single Color LED Controller (78470)

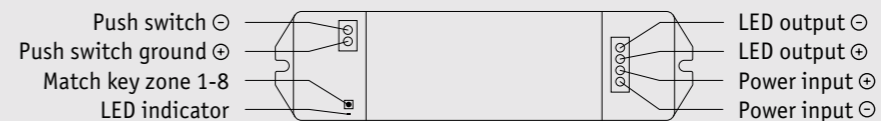


Connection diagram for Single Color Remote

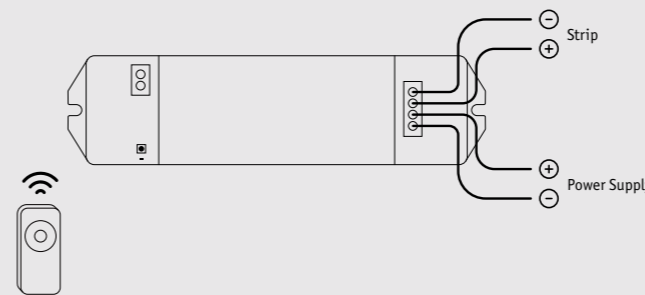


Connection diagram for operation via push-button switch

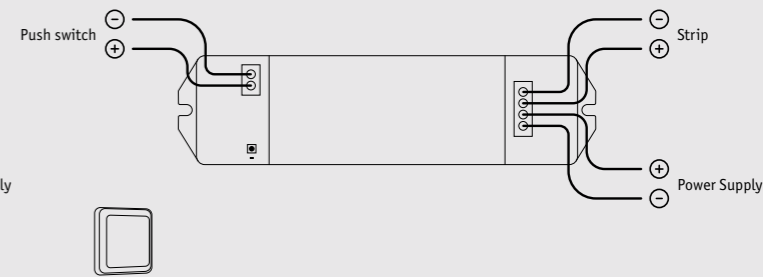


RGBW LED Controller (78471)

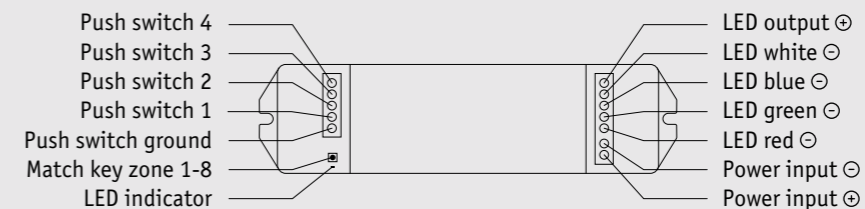


Connection diagram for RGBW Remote with RGBW strips

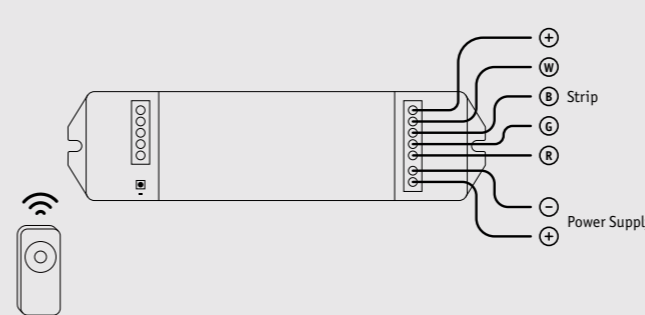

Connection diagram for Single Color Remote with monochrome LED strips

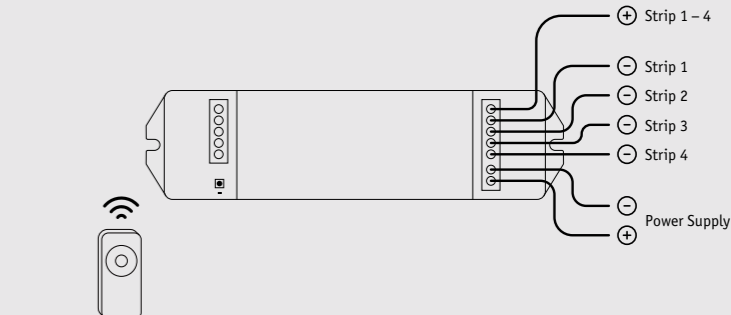

Connection diagram for operation via push-button switch with monochrome LED strips

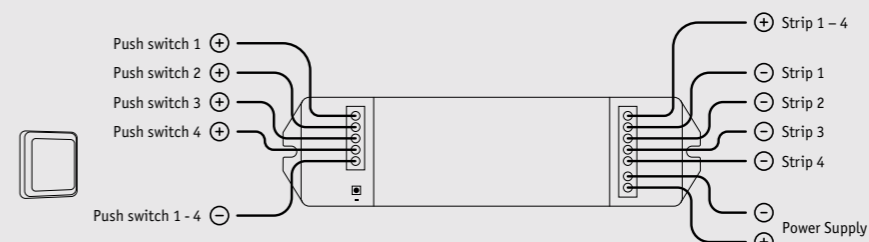

Feeds & connectors

Slim and Quick are perfect matches for Silver and Gold

Connectors suitable for

- Monochrome colour strips with a width of 8 or 10 mm or
- RGBW strips with a width of 12 mm

Slim & Quick for two different applications

- Slim for standard SMD LED and COB strips and designed for tight installation locations, such as inside profiles
- Quick can be connected using existing cables and the insulation displacement method



Individual packaging 1

Tray packaging 10

Slim (single colour)

	Power supply (Feed)		Connectors (Flex)		Direct connector (Direct)	
For strip width	8 mm	10 mm	8 mm	10 mm	8 mm	10 mm
Connection type	open cable ends/insulation displacement strip	open cable ends/insulation displacement strip	insulation displacement strip dual-sided	insulation displacement strip dual-sided	insulation displacement strip dual-sided	insulation displacement strip dual-sided
Number of terminals	2-wire	2-wire	2-wire	2-wire	2-wire	2-wire
Cable lengths	200 mm	200 mm	100 mm	100 mm	-	-
Cable cross-section	0.5 mm ²	0.5 mm ²	0.5 mm ²	0.5 mm ²	-	-
Max. current	4 A	4 A	4 A	4 A	6 A	6 A
Item	78457	78458	78459	78460	78461	78462
Compatible strips:	76006–76011 76013–76015		76006–76011 76013–76015		76006–76011 76013–76015	
Silver P25 5 m						
Silver P75 5 m		76016–76019		76016–76019		76016–76019
Silver P75 10 m		76025–76028		76025–76028		76025–76028
Silver P150 5 m		76021–76024		76021–76024		76021–76024
Silver COB P150 5 m		76029–76032		76029–76032		76029–76032
Gold P25 5 m	78438–78440		78438–78440		78438–78440	
Gold P75 5 m		78441–78444		78441–78444		78441–78444
Gold P75 10 m		78449–78452		78449–78452		78449–78452
Gold P150 5 m		78445–78448		78445–78448		78445–78448
Gold COB P150 5 m		78453–78456		78453–78456		78453–78456

Quick (single colour)

	Power supply (Feed)	Direct connector (Direct)	Slim (RGBW)		Quick (RGBW)	
For strip width	10 mm	10 mm	12 mm	12 mm	12 mm	12 mm
Connection type	open cable ends/insulation displacement strip	insulation displacement strip dual-sided	open cable ends/insulation displacement strip	insulation displacement strip / insulation displacement strip	insulation displacement strip dual-sided	open cable ends/insulation displacement strip
Number of terminals	2-wire	2-wire	5-wire	5-wire	5-wire	5-wire
Cable lengths	-	-	200 mm	100 mm	-	-
Cable cross-section	max. 0.5 mm ²	-	0.5 mm ²	0.5 mm ²	max. 0.5 mm ²	max. 0.5 mm ²
Max. current	5 A	5 A	6 A	6 A	6 A	5 A
Item	78463	78464	78465	78466	78467	78468
Compatible strips:			76012	76012	76012	76012
Silver P25 5 m						
Silver P75 5 m	76016–76019	76016–76019	76020	76020	76020	76020
Silver P75 10 m	76025–76028	76025–76028				
Silver P150 5 m	76021–76024	76021–76024				
Silver COB P150 5 m	76029–76032	76029–76032				
Gold P25 5 m						
Gold P75 5 m	78441–78444	78441–78444				
Gold P75 10 m	78449–78452	78449–78452				
Gold P150 5 m	78445–78448	78445–78448				
Gold COB P150 5 m	78453–78456	78453–78456				

Power supplies


Powerful and durable

- Matched perfectly to Paulmann Pro LED strips and controllers
- High-quality power supply devices with a very long service life of at least 50,000 h
- For all output levels – 20-150 W
- Two flat versions with particularly compact housing dimensions
- Integrated overload and short-circuit protection, temperature guard & electronic fuse
- TÜV, Dekra or ENEC-certified
- Noise-free at all dimmer settings


Power supplies specifications:

Input	220–240 V AC
Output voltage	24 V DC
Service life	50,000 h
IP protection	IP20
Packaging unit	1
Warranty	5 years

Independent DC Driver

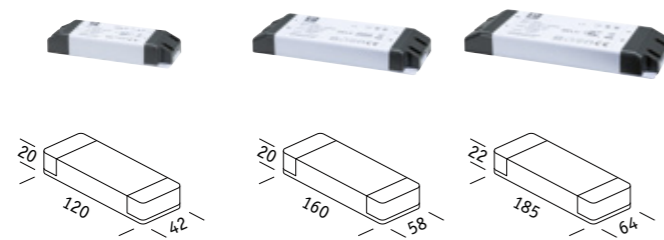

Independent DC Driver Flat

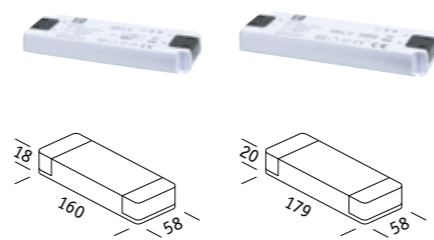

Technical data

Max. output	20 W	40 W	60 W	100 W	150 W
Ambient temperature Ta	-20 to +45°C	-20 to +45°C	-20 to +45°C	-20 to +45°C	-20 to +45°C
Housing temperature Tc	+85°C	+85°C	+85°C	+85°C	+85°C

Protection

Integrated short-circuit protection	✓	✓	✓	✓	✓
Integrated overload protection	✓	✓	✓	✓	✓
Integrated temperature monitor & electronic fuse	✓	✓	✓	✓	✓

Certification

TÜV Rhineland	✓			✓	
ENEC05			✓		
DEKRA		✓			✓
Item	79968	79969	79970	79971	79972

Packaging concept

Practical and sustainable

- All packaging is clearly and concisely labelled
- The packaging sizes are optimised for logistics to be as small and space-saving as possible
- Waste separation is not required: all packaging components can be recycled as waste paper



Strip on cardboard reel



Smallest possible outer carton



Space-saving 10-tray packs





Profiles

- Profiles can be shortened to any length and are compatible with all LED strips in the Paulmann range
- Multi-purpose lighting with LED strips
- Diffuser for uniform light distribution
- Can also be used as permanent lighting thanks to the use of economical LED strips
- Positive cooling effect for LED strips
- Versatile accessories for installation and profile termination




Delta Profile

High-quality triangular aluminium profile

A perfect choice for illuminated skirting boards, edging or base units

Incl. diffuser

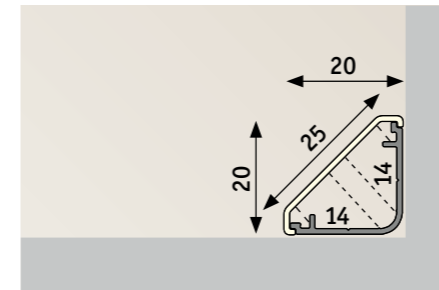

Profile 1 m: 70262
Profile 2 m: 70261



End cap 2-piece set:
70266



Cover 4-piece set:
70263



Outside corner
2-piece set: 70265



Corner 2-piece set:
70264




Floor Profile

Provides decorative effects for skirting boards in living spaces and around furniture

Can also be used for orientation or guiding in shaded and hazardous areas


Incl. diffuser

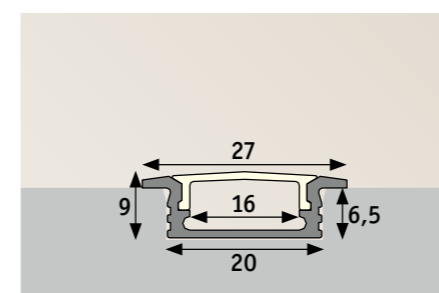

Profile 1 m: 70409
Profile 2 m: 70410



Profile material	aluminium
Profile colour	alu matt
Diffuser material	plastic
Diffuser colour	opal
Accessories	end caps

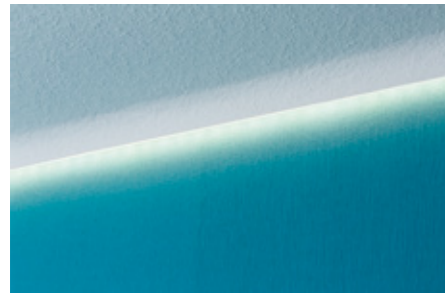


Corner Profile

Plastic hollow groove profile can be painted and wallpapered over to match the colour of the room

With satined diffuser for uniform light distribution

Incl. end caps and diffuser

Profile material	plastic
Profile colour	grey
Diffuser material	plastic
Diffuser colour	opal
Accessories	end caps

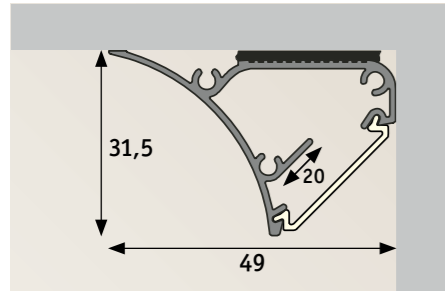

Profile 1 m: 70439
Profile 2 m: 70440



Outside corner 2-piece set: 70441
Inside corner 2-piece set: 70442




Duo Profile Set

The Duo Profile Set creates a double-sided lighting effect on the wall. The lighting effect changes depending on the position of the LED strips. The set contains the profile, three clips and a diffuser


With satined diffuser for uniform light distribution

Incl. holder and 1x diffuser

Profile material	aluminium
Profile colour	anodised aluminium
Diffuser material	plastic
Diffuser colour	opal
Accessories set	Holders

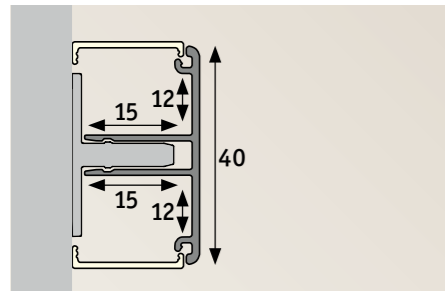

Profile 2 m, incl. 3x holder: 70519

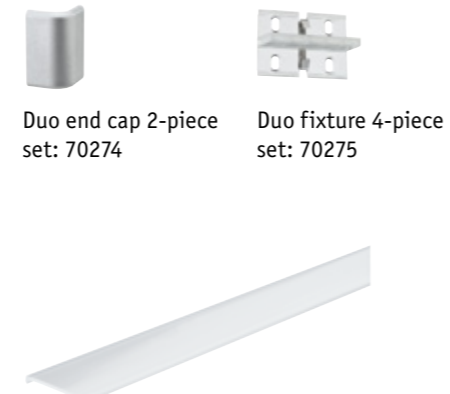

Duo end cap 2-piece set: 70274
Duo fixture 4-piece set: 70275



Duo diffuser 2 m: 70269




Tube Profile

The 2-metre Tube ceiling profile creates a uniform light strip on the ceiling

Incl. end caps and diffuser

Profile material	aluminium
Profile colour	anodised aluminium
Diffuser material	plastic
Diffuser colour	opal
Accessories	end caps

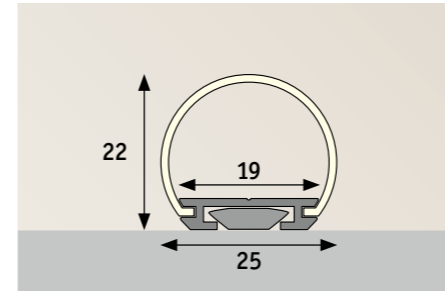

Profile 2 m: 70560




Base Profile

Slim surface-mounted profile for versatile installation

With satined diffuser for uniform light distribution

Incl. end caps and diffuser


Profile material	aluminium
Diffuser material	plastic
Accessories	end caps

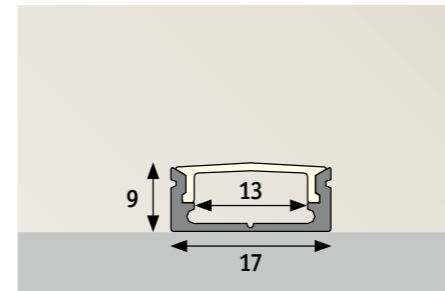

Profile colour: anodised aluminium, diffuser colour: opal
1 m: 70518
2 m: 70517

Profile colour: black matt, diffuser colour: opal
1 m: 78902
2 m: 78901

Profile colour: black matt, diffuser colour: black
1 m: 70521
2 m: 70522

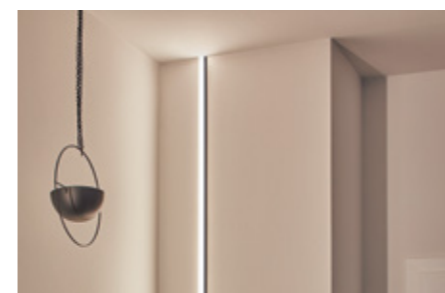


Square Profile

Surface-mounted profile for versatile installation

Can be installed flush on the wall or twisted by 90°

Incl. retaining clips to hold in place, end caps and diffuser

Profile material	aluminium
Diffuser material	plastic
Accessories	end caps, retaining clips

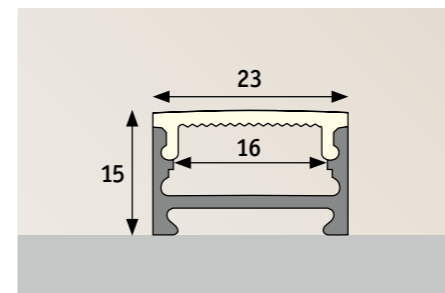

Profile colour: anodised aluminium, diffuser colour: opal
1 m: 70809
2 m: 70810

Profile colour: black matt, diffuser colour: opal
2 m: 78903

Profile colour: black matt, diffuser colour: black
1 m: 70523
2 m: 70524


P

Paulmann


You will find more items in our brochures:



Holistic lighting concepts
Perfect bathroom lighting

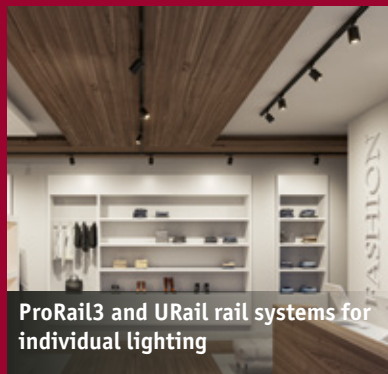

ProRail3 and URail rail systems for individual lighting

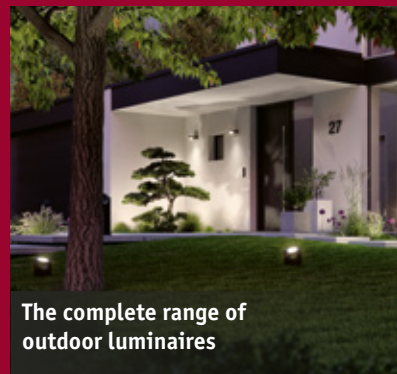

The complete range of outdoor luminaires

Contact Germany

Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe Völksen
Phone: +49 5041 998 317
fachvertrieb@paulmann.de