

RS PRO S20 SC - Multipack (5 ea.)



PC warm white
EAN 4007841 081959
Article number 081959



Function description

Intelligence is not a question of size. It's a question of inner values. The smartest luminaire in the world, now even better! High-frequency sensor luminaire RS PRO S-series, ideal for office corridors, hallways, toilet facilities, stairwells, including radio networking with other RS PRO S-series, 15,7 W LED, 1630 lm, PC cover, 3000 K, 360° detection, range Ø 1 - 8 m continuously adjustable, basic light function, and neighbourhood group function. The S-series can also be operated with direct current, which enables connection to central battery systems.

Technical specifications

Dimensions (Ø x H)	300 x 71 mm	Total product efficiency	104 lm/W
With lamp	Yes, STEINEL LED system	Colour temperature	3000 K
With motion detector	Yes	Colour variation LED	SDCM3
Manufacturer's Warranty	5 years	Lamp	LED cannot be replaced
Settings via	Bluetooth	Base	without
With remote control	No	LED cooling system	Passive Thermo Control
Version	PC warm white	Soft light start	Yes
PU1, EAN	4007841081959	Continuous light	selectable, 4h
Application, place	Indoors	Functions	Neighbouring group function, Group parameterisation, Manual ON / ON-OFF, Connection to central battery systems, Motions sensor, Adjustable fade time when switching on and off, Orientation light, DIM function, Free selection of the light value in a luminaire group, Light sensor, Normal / test mode, Encrypted communication
Application, room	corridor / aisle, function room / ancillary room, kitchenette, changing room, WC / washroom, stairwell, outdoors, Indoors		
Colour	Silver	Twilight setting	2 - 2000 lx
includes sheet of self-adhesive numbers	No		
Installation site	wall, ceiling		
Installation	Wall, Ceiling		

RS PRO S20 SC - Multipack (5 ea.)



PC warm white
EAN 4007841 081959
Article number 081959

Technical specifications

Impact resistance	IK07
IP-rating	IP20
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,39 W
Mounting height max.	4,00 m
Slave modeselectable	Yes
Detection	also through glass, wood and stud walls
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 10 m (79 m ²)
Reach, tangential	Ø 10 m (79 m ²)
Photo-cell controller	Yes
Transmitter power	< 1 mW
Luminous flux total product	1630 lm


Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function, detail	LED effect light
Basic light level function time	1-30 min, all day, all night
Main light adjustable	5 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth Mesh Connect
Lifetime LED according to IEC-62717 (L70)	100.000 h
Lifetime LED according to IEC-62717 (L80)	66.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lifetime LED according to IES TM-21 (L80)	>60.000 h
Fuse protection B10	46
Fuse protection B16	74
Fuse protection C10	77
Fuse protection C16	122
Basic light level function in per cent	7 – 100 %
Output	15,7 W
Colour Rendering Index CRI	= 82
Starting current, maximum	13 A
Angle of aperture	160 °
Detection angle	360 °

RS PRO S20 SC - Multipack (5 ea.)




PC warm white
 EAN 4007841 081959
 Article number 081959

Detection Zone

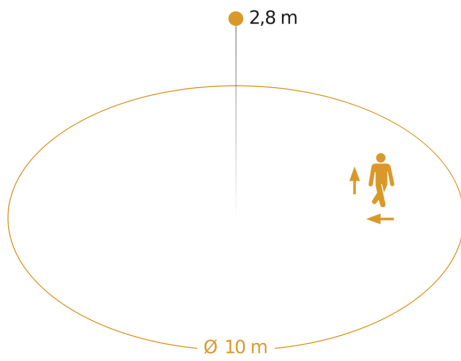


Possible mounting height: 2,00 m - 4,00 m
 Orange: radial and tangential

Dimension Drawing

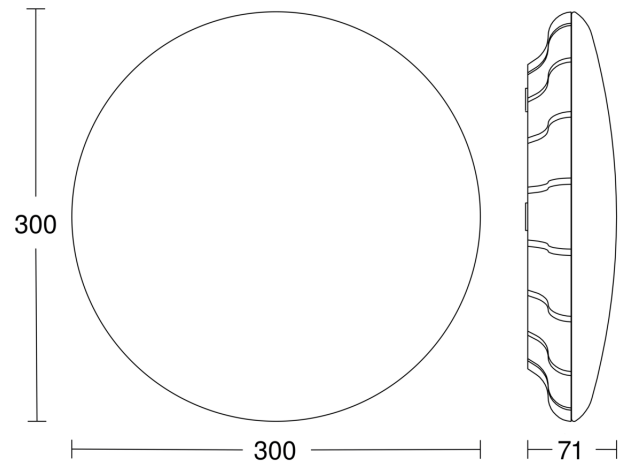


Light Distribution Curve



Output	15,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Colour temperature	3000 K
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Slave/wireless master interconnection circuit diagram



Sensor-switched LED indoor light - Professional Line

RS PRO S20 SC - Multipack (5 ea.)

PC warm white

EAN 4007841 081959

Article number 081959



Master/master interconnection circuit diagram

