

Sensor-switched LED outdoor light

L 820 SC

Anthracite

EAN 4007841 065713

Article number 065713



Up-/Downlight

LED

30 Jahre (Ø 4,5 Std / Tag)

3000 K

3000K warmweiß



Intelligenter Hochfrequenz-Sensor 160°



1 - 5 m



IP44



2 - 2000 Lux



Lichtquelle nicht austauschbar



Betriebsgerät nicht austauschbar



10 Sek - 60 Min

Function description

The most modern outdoor light in the world. Designer sensor-switched outdoor light L 820 SC with invisible high-frequency sensor, ideal for building entrances and fronts of buildings, 9,8 W STEINEL LED lighting system, 679 lm, 160° coverage angle, reach from 1 - 5 m, for stylish up and downlighting with house number panel, includes soft light start and optional manual override for 4 hours. Wirelessly interconnectable by Bluetooth and adjustable and controllable via free app.

Technical specifications

Dimensions (L x W x H)	146 x 230 x 261 mm	Transmitter range	30 m
With lamp	Yes, STEINEL LED system	Transmitter power	< 1 mW
Manufacturer's Warranty	3 years	Luminous flux total product	679 lm
Settings via	Connect Bluetooth Mesh, App	Measured luminous flux (360°)	679 lm
With remote control	No	Total product efficiency	69 lm/W
Version	Anthracite	Colour temperature	3000 K
PU1, EAN	4007841065713	Colour variation LED	SDCM3
Application, place	Outdoors	Lamp	LED cannot be replaced
Application, room	front door	Service life LED L70B50 (25°)	> 60000 h
Colour	Anthracite	Drop in luminous flux in accordance with LM80	L70B10
includes sheet of self-adhesive numbers	Yes	Base	without
Installation site	wall	LED cooling system	Active and Passive Thermo Control
Impact resistance	IK03	Soft light start	Yes
IP-rating	IP44	Continuous light	selectable
Protection class	II	Functions	Motions sensor
Ambient temperature	-20 – 40 °C	Twilight setting	2 – 2000 lx

<https://www.steinell.de>

Subject to technical modifications

05.2024 Page 1 from 3

L 820 SC

Anthracite
 EAN 4007841 065713
 Article number 065713



Technical specifications

Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	9,8 W
Mounting height max.	2,50 m
Slave modeselectable	Yes
Sneak-by guard	No
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, detail	Detection zone adjustable on 2 axes
Reach, radial	r = 5 m (35 m ²)
Reach, tangential	r = 5 m (35 m ²)
Photo-cell controller	Yes

Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function time	OFF, Brightness-controlled, 10 sec – 60 min
Main light adjustable	0 - 100 %
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Basic light level function in per cent	10 – 100 %
Basic light level function percentage, from	10 %
Basic light level function percentage, up to	100 %
Interconnection via	Bluetooth Mesh Connect
Colour Rendering Index CRI	= 82
Optimum mounting height	2 m
Detection angle	160 °

Sensor-switched LED outdoor light

L 820 SC


Anthracite

EAN 4007841 065713

Article number 065713




Detection Zone

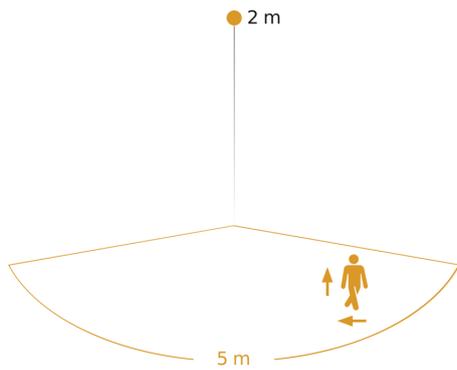

Possible mounting height: 1,80 m - 2,50 m
Orange: radial and tangential

Dimension Drawing

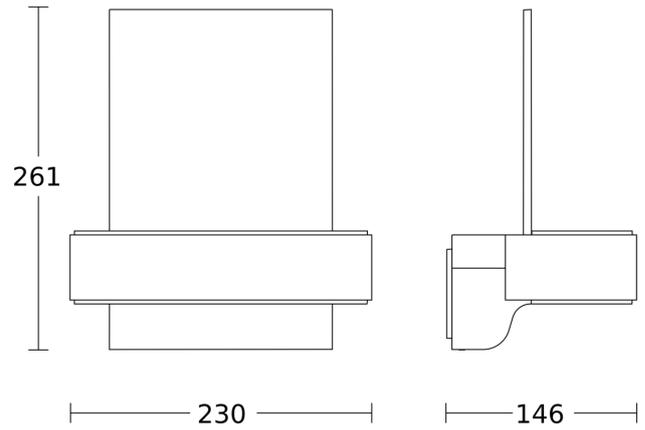

Circuit diagram Bluetooth

