

# RS PRO R20 plus SC

Neutral white  
 EAN 4007841 067724  
 Article number 067724



36 years (Ø 4,5h / day)	Settings via App	4000K neutral white	high frequency sensor 360°	max. 10 m	2 - 2000 lux	IP40	Light source not exchangeable	Control gear not exchangeable	5 sec - 30 min

## Function description

Digital. Ingenious. Wirelessly adjustable via app, the digital RS PRO R20 plus SC sensor-switched light makes connected lighting incredibly easy. Easily started up, interconnected and adjusted in any chosen way via app, it comes with 4 lighting functions: basic light level, backlight, dimmable main light and emergency light. High-precision HF sensor (10 m reach). The opal diffuser bonnet ensures even light distribution. 15,86 W, 1976 lm. 4000 K, 350 x 55 mm. Emergency lighting operation is alternatively possible via connection to central battery systems.

## Technical specifications

Dimensions (Ø x H)	350 x 55 mm	Total product efficiency	125 lm/W
With lamp	Yes, STEINEL LED system	Colour temperature	4000 K
With motion detector	Yes	Colour variation LED	SDCM3
Manufacturer's Warranty	5 years	Lamp	LED cannot be replaced
Settings via	Bluetooth	Base	without
With remote control	No	LED cooling system	Passive Thermo Control
Version	Neutral white	Soft light start	Yes
PU1, EAN	4007841067724	Continuous light	selectable
Application, place	Indoors	Functions	Group parameterisation, Manual ON / ON-OFF, Neighbouring group function, Presence function, Backlight, Orientation light. Connection to central battery systems, Adjustable fade time when switching on and off, Free selection of the light value in a luminaire group, Encrypted communication, Motions sensor, Light sensor, Master/slave override
Application, room	corridor / aisle, changing room, function room / ancillary room, kitchenette, stairwell, Indoors		
Colour	white	Twilight setting	2 – 2000 lx
includes sheet of self-adhesive numbers	No		
Installation site	wall, ceiling		
Installation	Wall, Ceiling, Surface wiring		

# RS PRO R20 plus SC

Neutral white

EAN 4007841 067724

Article number 067724



## Technical specifications

Impact resistance	IK07
IP-rating	IP40
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	PC, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,3 W
Mounting height max.	4,00 m
HF-system	5,8 GHz
Slave modeselectable	Yes
Detection	also through glass, wood and stud walls
Capability of masking out individual segments	Yes
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 10 m (79 m <sup>2</sup> )
Reach, tangential	Ø 10 m (79 m <sup>2</sup> )
Photo-cell controller	Yes
Transmitter power	< 1 mW
Luminous flux total product	1976 lm

Time setting	5 s – 60 Min.
Basic light level function	Yes
Basic light level function, detail	LED Backlight
Basic light level function time	1-60 min
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	Bluetooth Mesh Connect
Lifetime LED according to IEC-62717 (L70)	100000
Lifetime LED according to IEC-62717 (L80)	74000
Lebensdauer LED nach IES TM-21 (L70)	70000
Lifetime LED according to IES TM-21 (L80)	70000
Fuse protection B10	46
Fuse protection B16	74
Fuse protection C10	77
Fuse protection C16	122
Basic light level function in per cent	0 – 100 %
Output	15,86 W
Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
Angle of aperture	160 °
IP-rating, ceiling	IP40

## Accessories


EAN 4007841 064143

R-series emergency light module

# RS PRO R20 plus SC


Neutral white  
EAN 4007841 067724  
Article number 067724

## Detection Zone

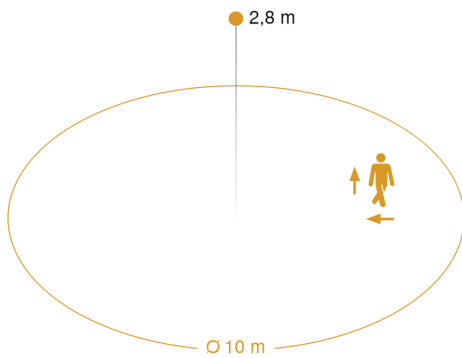


Possible mounting height: 2,00 m– 4,00 m  
Orange: radial and tangential

## Dimension Drawing

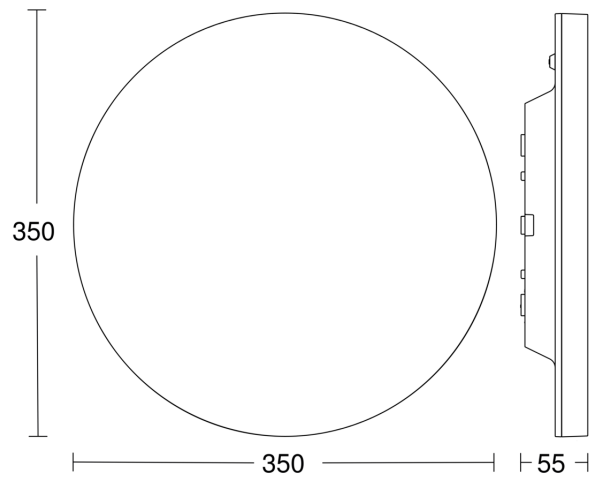

## Slave/wireless master interconnection circuit diagram



## Master/master interconnection circuit diagram

